
HARDWARE ITEM			QTY
A2		Screw m3.5 x 14mm	44
A4		Screw m3.5 x 20mm	4
A6	Dimmi	Screw m4 x 25mm	4
A17		Crosshead Screw m6.3 x 40mm	24
A18	_111111111111	Crosshead Screw m6.3 x 50mm	4
C5	000	Square Lock Set	1 Set
E9		Door Hinge 7/8"	4
H3		Handle 96mm (Silver)	2
L2		Plastic Leg L Shape	4
N1		Allen Key	1
N3		Nail	50 (+-3)
R1		L Bracket	2
S1		Door Catches	1
S2		Door Stopper	1

COMPLETE

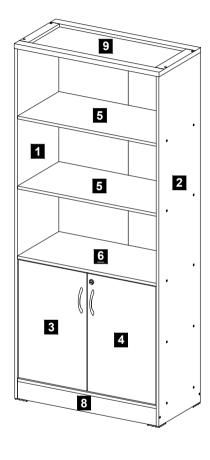

CAUTION


MATERIAL USE LAMINATED PARTICLE BOARD, TO CLEAN USE SOFT, DRY CLOTH. DO NOT USE DETERGENT OR CHEMICAL AVOID CONTACT WITH WATER AND DIRECT SUNLIGHT. TO BE ASSEMBLED ON A SOFT, DRY, CLEAN SMOOTH SURFACE.

USE OF POWER TOOLS TO ASSEMBLE THIS PRODUCT WILL INVALIDATE ANY CLAIM AND MAY DAMAGE THIS PRODUCT MAKING IT UNSAFE.




PRE - ASSEMBLY STEP 1 | Assemble the Door Catche


Assemble the Door Catches (S1) at panel no. 3 by using Screw m3.5 x 14mm (A2). Assemble the Door Hinges 7/8" (E9) by using Screw m3.5 x 14mm (A2) and assemble the Handle (H3) by using Screw m4 x 25mm (A6) at panel no. 3 & 4. Then, assemble the Square Lock Set (C5) at panel no. 4 by using Screw m3.5 x 20mm (A4).

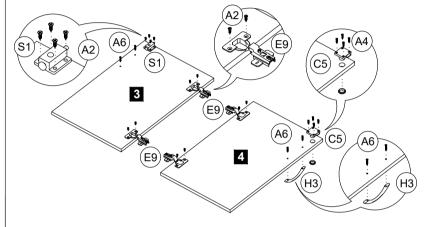


STEP 2 Insert the Door Stopper (S2) at panel no. 6.

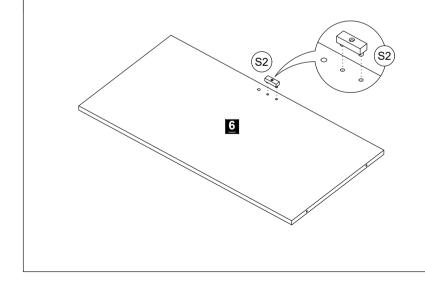


Assemble panel no. 2, 5, 6, 7 & 8 together by using Crosshead Screw m6.3 x 40mm (A17). Use Allen Key (N1) to tighten the Crosshead Screw m6.3 x 40mm (A17).

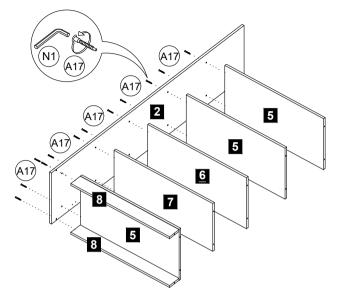


Assemble panel no. 1 to the unit by using Crosshead Screw m6.3 x 40mm (A17). Use Allen Key (N1) to tighten the Crosshead Screw m6.3 x 40mm (A17).

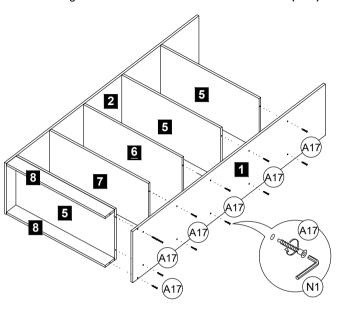

Assemble panel no. 9 to the unit by using Crosshead Screw m6.3 x 50mm (A18). Use Allen Key (N1) to tighten the Crosshead Screw m6.3 x 50mm (A18).

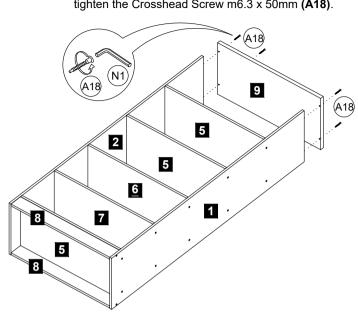

Assemble the panel no. 10 to the unit by using Nail (N3). Then, assemble the L Bracket (R1) at between panel no. 5 & 8 by using Screw m3.5 x 14mm (A2). Assemble the Plastic

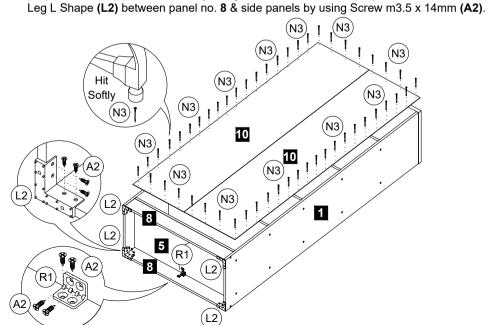

STEP 7 Attach the door panels no. 3 & 4 to the unit. Adjust the Door Hinges 7/8" (E9) to screw parallel between the door gaps.

Stand

